


Tile Feature Panel Construction Guide

Material used:

Hume Doors &
Timber 67mm x
18mm x 2.7m Pencil
Round Primed MDF
Moulding

VNL 8470532

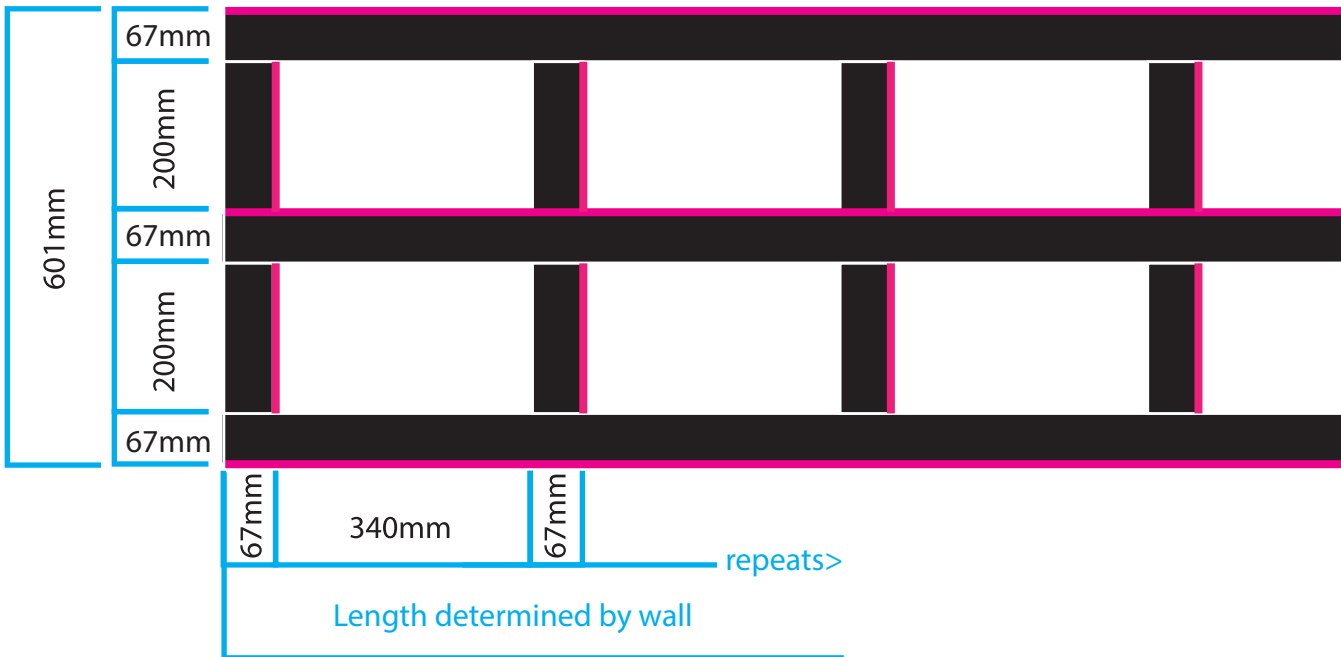

Notes on the curved edge:

To keep costs down an economic material has been selected. It serves our purposes but does have a round edge on 1 side (a flat edge would be desirable). To accommodate this we have positioned the curved sides in a particular way to avoid detection. The pink lines in the diagram above show where the curved edges should be positioned.

The vertical lines can have the curve face in either direction, but they should all face the same direction as each other (it's best to have the flat edge of these lines facing towards your entrance).

Once the panels are painted black, it is relatively noticeable that there is a curved edge.

Notes on the Horizontal Spacing between vertical stripes

Depending on the length of your wall you might have an odd sized tile space left at 1 end. The horizontal distance between our vertical stripes can be 'slightly' adjusted to balance this out and create a uniform finish overall. (Adjustments should not exceed 50mm)

Alternatively, the variance at 1 end may be noticeable to the naked eye and could be left as it is.

